


15S/9P-3 Phone jacks Series Connectors

1060 Series 15S/9P 3 Phone Jacks

Key Specifications/Special Features:

- 160 series: 15P connector + 3 phone jacks
- D-sub connector:
 - Electrical characteristics:
 - Contact current rating: 5A
 - Contact resistance: 30mohms max.
 - Dielectric withstanding voltage: 1000VAC
 - Insulation resistance: 5000Mohms min.
 - Operating voltage: 500V
 - Mechanical characteristics:
 - Connector mating force: 11.25LBS max.
 - Connector unmating force: 0.70LBS min.
 - Operating temperature: -55°C to +105°C
 - Durability: 500 mating cycles
 - Materials:
 - Shell: steel, tin finish
 - Contact: phosphor bronze
 - Insulator: PBT UL 94V-0
 - Grounding: brass
- Audio jack:
 - Electrical characteristics:
 - Contact current rating: 1A
 - Contact resistance: 30mohms max.
 - Dielectric withstanding voltage: 500VAC
 - Insulation resistance: 100Mohms

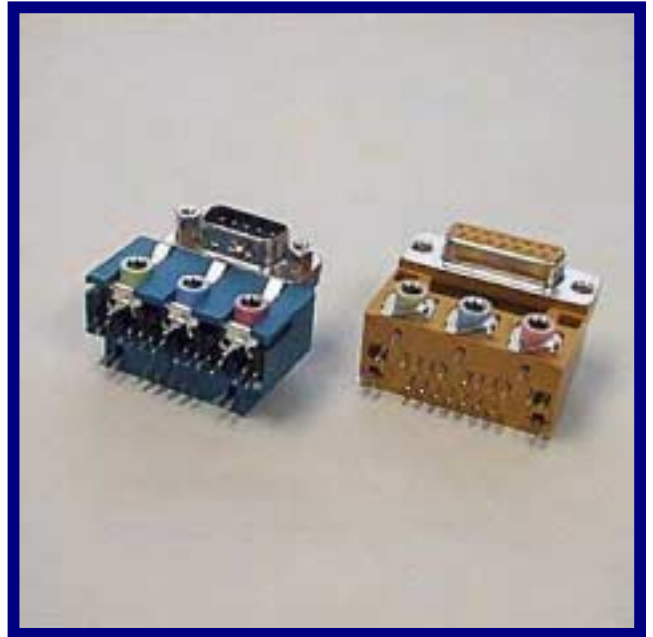

For ordering information please consult our sales department